

Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Sabre

WS-W81619

FEATURES

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Extruded acrylic diffuser
- Conversion plate included for 4" junction box

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Energy Star 2.0
Input	120-277V, 50/60Hz
Driver Dimension	2.8" x 1.3" x 1.2"
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3500K
CRI	90
Construction	Aluminum 1/4" thick co-extruded clear white optical acrylic

WS-W81619

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W81619 19"	3500K	AL Brushed Aluminum	15.3W	1342	1267

Example: **WS-W81619-AL**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Sabre


WS-W81625

FEATURES

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Extruded acrylic diffuser
- Conversion plate included for 4" junction box

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Energy Star 2.0
Input	120-277V, 50/60Hz
Driver Dimension	2.8" x 1.3" x 1.2"
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3500K
CRI	90
Construction	Aluminum 1/4" thick co-extruded clear white optical acrylic

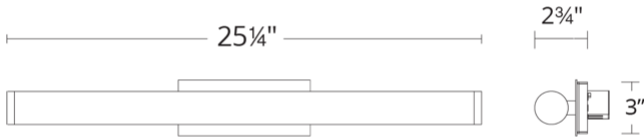

WS-W81625

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W81625 25"	3500K	AL Brushed Aluminum	20.2W	1828	1730

Example: **WS-W81625-AL**

For custom requests please contact customs@modernforms.com



Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Sabre


WS-W81637

FEATURES

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Extruded acrylic diffuser
- Conversion plate included for 4" junction box

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Energy Star 2.0
Input	120-277V, 50/60Hz
Driver Dimension	2.8" x 1.3" x 1.2"
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3500K
CRI	90
Construction	Aluminum 1/4" thick co-extruded clear white optical acrylic

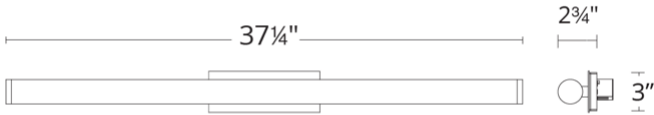

WS-W81637

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W81637 37"	3500K	AL Brushed Aluminum	29.7W	2696	2619

Example: **WS-W81637-AL**

For custom requests please contact customs@modernforms.com