

12W CONSTANT CURRENT LED DRIVER

Cat. No. LA1012-XX



The Hunza LA1012-XX is a 12 Watt, 1000mA constant current driver. It includes overload protection and short-circuit protection.

AC Input Range: 100-240Vac/ 0.3A/ 47-63Hz

DC Output: 3-12Vdc / 1000mA (constant current)

Wattage: 12W Max.

Driver Weight: 120g


Standards: UL1310, UL8750 Class 2.cUL(Type HL), FCC B, PSE, CE (EN55015, EN61547, EN61347-2-13, EN61000-3-2 class A)

IP66

Suitable for Dry Locations

Convection Cooled in plastic housing.

Dimensions: 85(L), 35(W), 24(H)

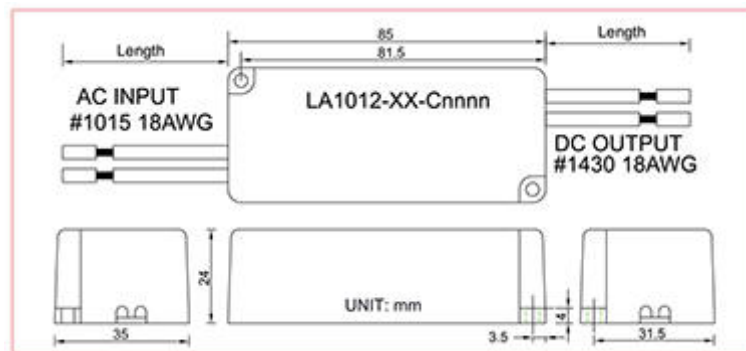

      IP66 RoHS REACH

HUNZATM PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunzaligning.com

INTERNATIONAL CONTACTS:
www.hunzaligning.com/contact.php
Specifications may change without notice.
Manufactured in New Zealand.
2016 Hunza Productions Ltd.